



OPTION 1 – PAINTING OPER.

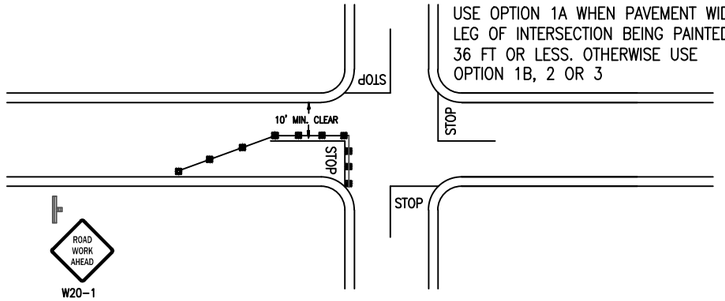

USE OPTION 1A WHEN PAVEMENT WIDTH ON LEG OF INTERSECTION BEING PAINTED IS 36 FT OR LESS. OTHERWISE USE OPTION 1B, 2 OR 3


OPTION 1A – DRYING OPER.

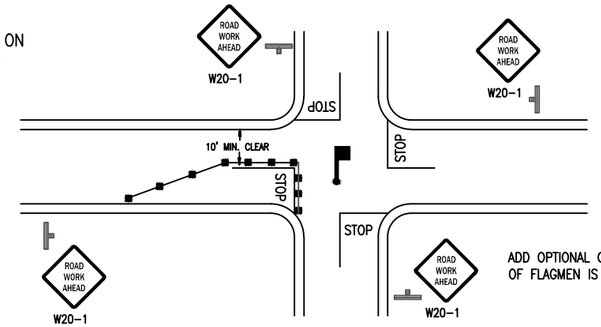


ADD OPTIONAL C9A IF VISIBILITY OF FLAGMEN IS LIMITED.

OPTION 1B – DRYING OPER.

4 WAY STOP–MINOR STREETS

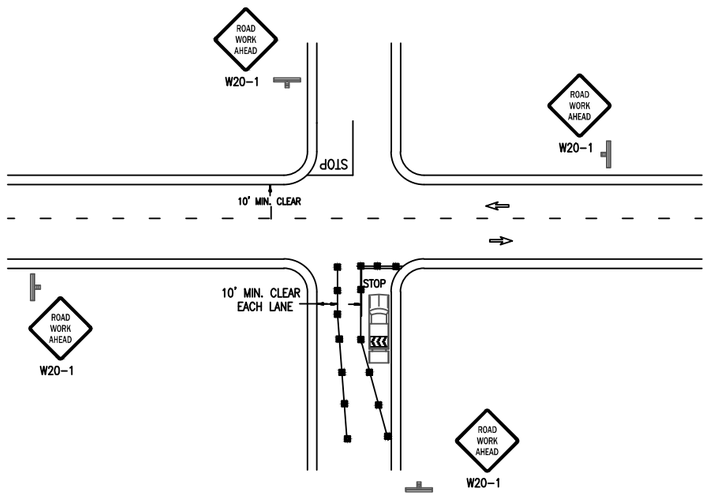


OPTION 2 – PAINTING/DRYING OPER.

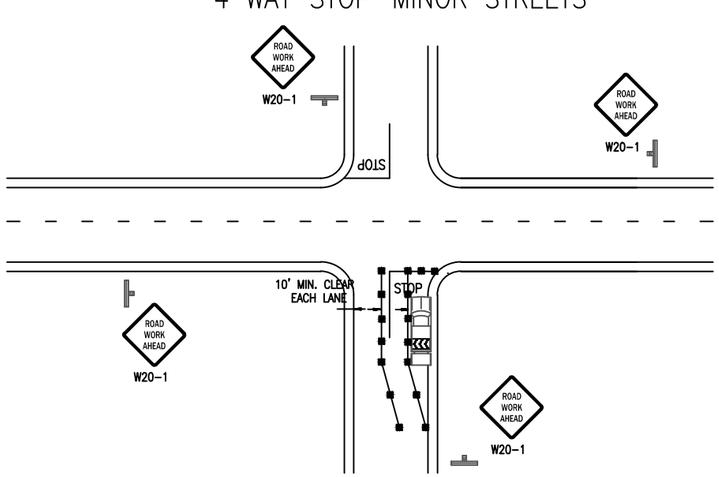

OPTION 3A – PAINTING/DRYING OPER.

2 WAY STOP–MINOR /MAJOR STREETS

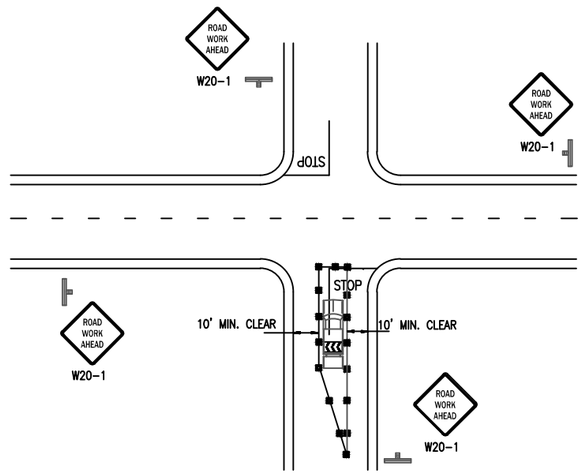

OPTION 3B – PAINTING/DRYING OPER.

LEGEND

- CONE
- BARRICADE
- FLAGGER
- SIGN
- ARROW PANEL
- WORK AREA
- TRAFFIC DIRECTION
- CHANGEABLE MESSAGE SIGN

GENERAL NOTES

–See TC–05 for sign description. All warning signs shall have a black legend and border on an orange background unless otherwise noted on the drawing.

–See TC–06 for sign spacing, spacing of cones, taper and buffer lengths. Sign spacing may be increased and cone spacing may be decreased.

–Signs may not be substituted.

–Signs and Devices must be visible at 1000'.

–See Sheet TC–45 for pedestrian mitigation.

–Share The Road signage required when outermost lane plus paved shoulder is less than 14'.

–The W13–1P(25) shall be used when the lane adjacent to work is less than 11 feet and when the work is not protected by a fixed barrier.

COMPETENT PERSON

NAME _____

PHONE _____

POSTED SPEED LIMIT	*TAPER LENGTH	*SPACING OF CONES	*SIGN SPACING	*BUFFER LENGTH

* REFERENCE TABLES ON TC–06

REVISIONS			
REV.	DESCRIPTION	BY	DATE
1	–New Sheet	GDK	2/14

REZA MOGHISSI, CHIEF
DEPARTMENT OF TRANSPORTATION

SACDOT

M & O TYPICAL TRAFFIC CONTROL PLANS

SHORT DURATION

60 MINUTES OR LESS

LEGEND PAINTING

JOB NO. _____
TEMPLATE NAME TC–44
DRAWN LB
DESIGNED _____
CHECKED SU/GK
SHEET DATE 7/1/2010

SCALE
HOR: N/A
VER: N/A

SHEET
TC–47
OF 50 SHEETS